PRODUCT CODE: 3XI28-MOCHA	WATCHTOWER SET – MOCHA MOUSSE	ROLLMAGINE

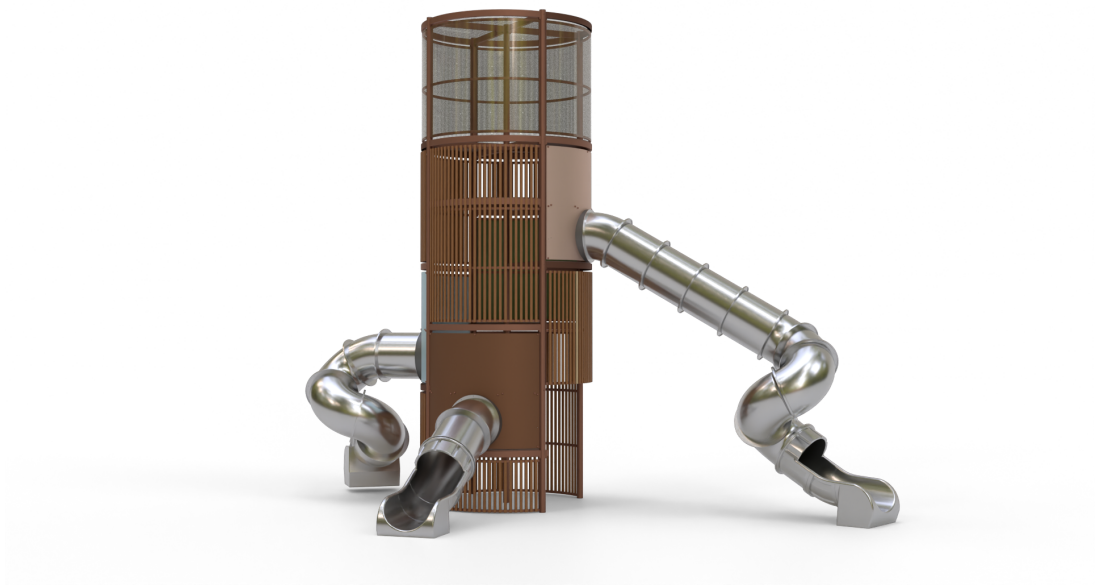

DEVICE DATA

PROJECTION AND VIEW OF THE DEVICE

The device is difficult to access

Compliance with the PN-EN standard: 1176-1:2024-03

Number of users : 50

Age group : +3

Width : 5.61 m

Length : 10.03 m

Height : 8.05 m

Minimum space required : 8.11 mx 12.06 m

Free fall height : 2.00 m

Fall area : 54.55 ^{m2}

Foundation depth : -1.20 m

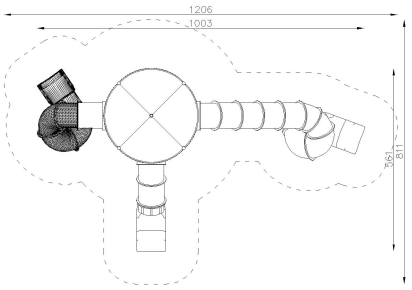

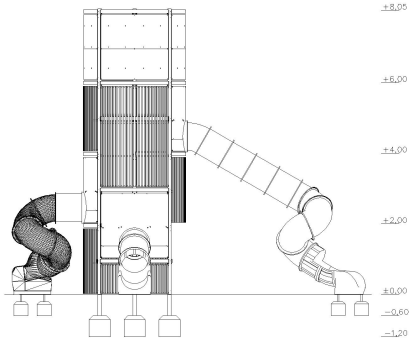

COMPONENTS

Tower on a circular plan 2800 – 1 pc.

Viewing platform – 1 pc.

Tubular slide, height 1.00 m – 1 pc.

Tubular slide, height 2.00 m – 1 pc.

Tubular slide, height 4.00 m – 1 pc.

Full arched panel – 1 pc.

Arched transparent panel – 4 pcs.

Arched openwork panel with slats – 7 pcs.

TECHNOLOGY

Vertical structure: pipes ∅101.6×4.5 mm, galvanized, powder coated

Horizontal structure: 80x40x4mm profiles, galvanized, powder coated

Platforms: anti-slip HPL board

Complementary metal elements: galvanized steel, powder coated

Arched decorative panel with slats: black steel structure, galvanized, powder coated, filled with slats

Lamellas: planed boards, protected against weathering. Wood with a minimum Brinell hardness of Class III.

Transparent panel: black steel structure, galvanized, powder coated, polycarbonate filling

Transition in arched panels: plastic formed by rotational molding, attached to a flange made of black, galvanized and powder-coated steel

Roof: black steel structure, galvanized, powder coated, perforated aluminum sheet (alternatively stainless steel), polycarbonate

Slide: rotomolded plastic (optional stainless steel)

End caps: plastic

Foundations: concrete class at least C20/25

Due to continuous improvement of technical solutions, the presented drawings, including colors and dimensions, may differ slightly from the currently manufactured devices.

NOLMO Sp. z o. o. reserves all rights to copyright protection under the Act of 04.02.1994 on Copyright and Related Rights (Journal of Laws No. 28 item 83), in particular Articles 78 and 79 of that Act.