

TECHNICAL DATA:


Easily accessible device,
according to standard EN 1176-1:2017

Device dimensions: 4,74 x 5,43m
 Device height: 2,30m
 Minimum space: 11,44 x 12,07m
 Critical fall height: 1,25m
 Falling area: 108,96m²
 Depth of foundations: -0,60m

The device according to EN 1176-1:2012
 Playground equipment and surfacing – Part 1:
 General safety requirements and test methods.

Safety surfaces:
 - sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials
 200+100mm
 - synthetic surface according to critical fall height

Top view with falling area

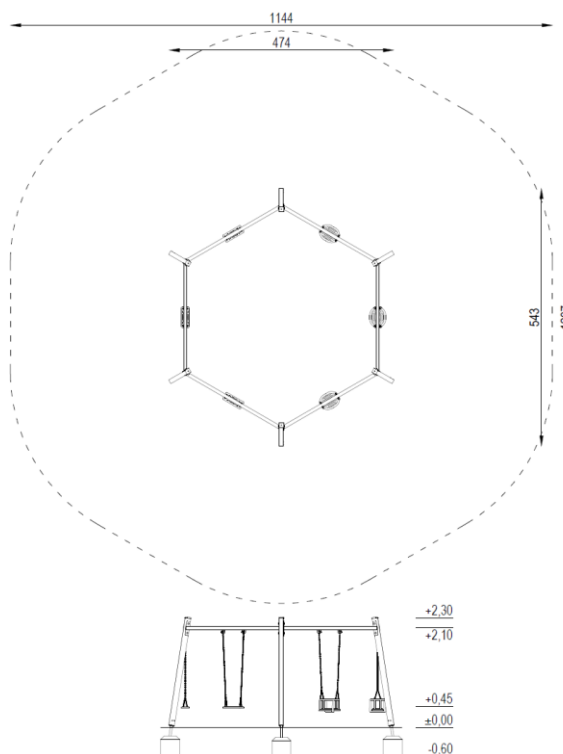

MATERIALS:

Construction poles:	glued pine wood, rounded at the edges, coated with acrylic glaze
Anchors:	steel galvanized
Steel elements:	galvanized steel, powder coated
Seats:	made of steel structure coated with rubber
Decorative elements:	HDPE sheet
Chain:	galvanized steel,
Caps:	plastic
Foundations:	concrete class min. C12/15



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.